


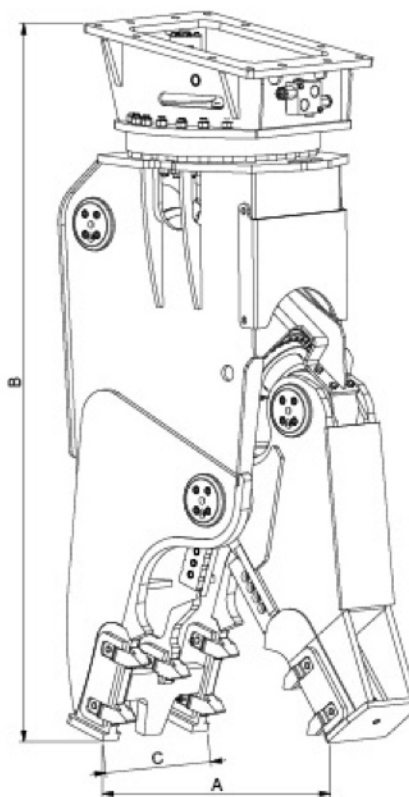

TECNICAL DATA	U.M. (EU)	RD 5	RD 15	RD 20	RD 25	RD 32	U.M. (USA)	RD 5	RD 15	RD 20	RD 25	RD 32
OPENING "A"	mm	390	770	870	1095	1165	inch	15.35	30.31	34.25	43.11	45.87
LENGHT "B"	mm	1450	2065	2310	2450	2500	inch	57.09	81.30	90.94	96.46	98.42
DEPTH "C"	mm	300	490	500	520	530	inch	11.81	19.29	19.69	20.47	20.87
EXCAVATOR WEIGHT	ton	5-8	10-20	21-28	25-32	26-40	lb	11023 17637	22046 44092	46297 61729	55116 70548	57320 88185
WEIGHT	Kg	480	1400	1850	2150	3000	lb	1058	3086	4079	4740	6614
OIL PRESSURE	bar	250	300	310	320	320	psi	3626	4351	4496	4641	4641
OIL CAPACITY	l/min	50-60	180-220	220-240	240-300	250-300	gpm	13.21 15.85	47.55 58.12	58.12 63.40	63.40 79.25	66.04 79.25
ROTATION OIL PRESSURE	bar	20	60	60	60	60	psi	290	870	870	870	870
ROTATION OIL CAPACITY	l/min	3	30	30	30	30	gpm	0.80	8	8	8	8
HYDRAULIC ROTATION		360 °	360 °	360 °	360 °	360 °		360 °	360 °	360 °	360 °	360 °