


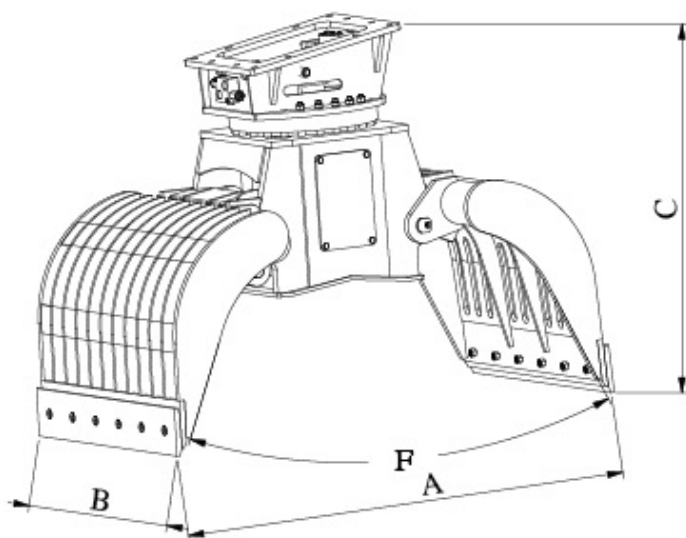

TECNICAL DATA	U.M. (EU)	BS 5	BS 12	BS 16	U.M. (USA)	BS 5	BS 12	BS 16
OPENING "A"	mm	1150	1760	2000	inch	45.28	70.87	78.74
LENGHT "B"	mm	500	800	1000	inch	16.69	31.50	39.37
HEIGHT "C"	mm	800	1400	1500	inch	31.50	55.12	59.06
FORCE "F"	ton	4	5	5.5	lb	8818	11023	12125
EXCAVATOR WEIGHT	ton	4-8	14-18	18-22	lb	8818 17637	30865 39683	39683 48502
WEIGHT	Kg	400	1100	1500	lb	882	2425	3307
OIL PRESSURE	bar	200	250	300	psi	2901	3626	4351
OIL CAPACITY	l/min	25	50	50	gpm	13.21 15.85	47.55 58.12	58.12 63.40
ROTATION OIL PRESSURE	bar	20	60	60	psi	290	870	870
ROTATION OIL CAPACITY	l/min	2	30	30	gpm	0.80	8	8
HYDRAULIC ROTATION		360 °	360 °	360 °		360 °	360 °	360 °